

# FORKLIFT AGV

## SPECIFICATIONS



**SOUTHEAST  
INTEGRATED  
SOLUTIONS**

powered by



Southeast Industrial Equipment powered by AIM

📍 Charlotte, NC

☎ 704.737.1890

🌐 [sieagvspoweredbyaim.com](http://sieagvspoweredbyaim.com)

# HIGHLIGHTS

AGV forklifts (Automated Guided Vehicle) are advanced, self-operating machines designed to automate material handling tasks in warehouses and distribution centers. They excel in applications such as picking from the end of a production line and dropping items at staging areas, or retrieving goods from the floor and placing them in storage racks. With their precision navigation and efficiency, AGV forklifts optimize workflows, reduce labor costs, and enhance overall productivity in high-demand environments.



**WEIGHT CAPACITY**  
Up to 5,500lbs.



**BATTERY TYPE**  
LEAD ACID



**NAVIGATION**  
LASER GUIDANCE



**CHARGING TYPE**  
FAST CHARGE



**TRAVEL CAPABILITY**  
BI-DIRECTIONAL



**LIFT HEIGHT**  
Up to 110"



# AGV SPECIFICATIONS

## General Specifications

**Type:** Forklift Automated Guided Vehicle (AGV)

**Model Name/Number:** eBOTSD1240

**Manufacturer:** America in Motion

**Operation Mode:** Autonomous

**Navigation Type:** Laser-guided

**Battery Type:** Lead Acid

**Battery Capacity:** 48V, 380Ah

**Charging Type:** Fast Charging

**Indoor/Outdoor Use:** Indoor

**Customization:** Standard options available

## Performance & Load Handling

**Maximum Load Capacity (Max for flat surfaces only):** Up to 5,500 lbs.

**Load Center:** 24"

**Travel Capability:** Bi-Directional

**Standard Lift Height:** Up to 110" (taller lift height options available)

**Fork Length:** 48"

**Standard Travel Speed:** 1.2 m/s

**Standard Lift Speed:** 6 in/sec

**Mast Type:** 2 stage ball screw for precision

**Standard Gradient Capability:** 0 deg

**Turning Radius:** 80"

## Safety Features

**Emergency Stop Button:** Yes

**Obstacle Detection:** Yes

**Safety Bumpers:** Yes

**Anti-collision Sensors:** Yes

## Interface & Control

**User Interface:** [Touchscreen / Button panel / Mobile app / Remote control]

**Communication Protocol:** [Wi-Fi / Bluetooth / Ethernet / 5G]

**Software Integration:** [Warehouse Management System (WMS), ERP, or other integrations]

## Price & Warranty

**Price Range:** Contact SIE

**Warranty:** 1 year




# TURNING RADIUS



# SAFETY FIELD

*Warning Field - up to 25 meters @ 40 mm object resolution*

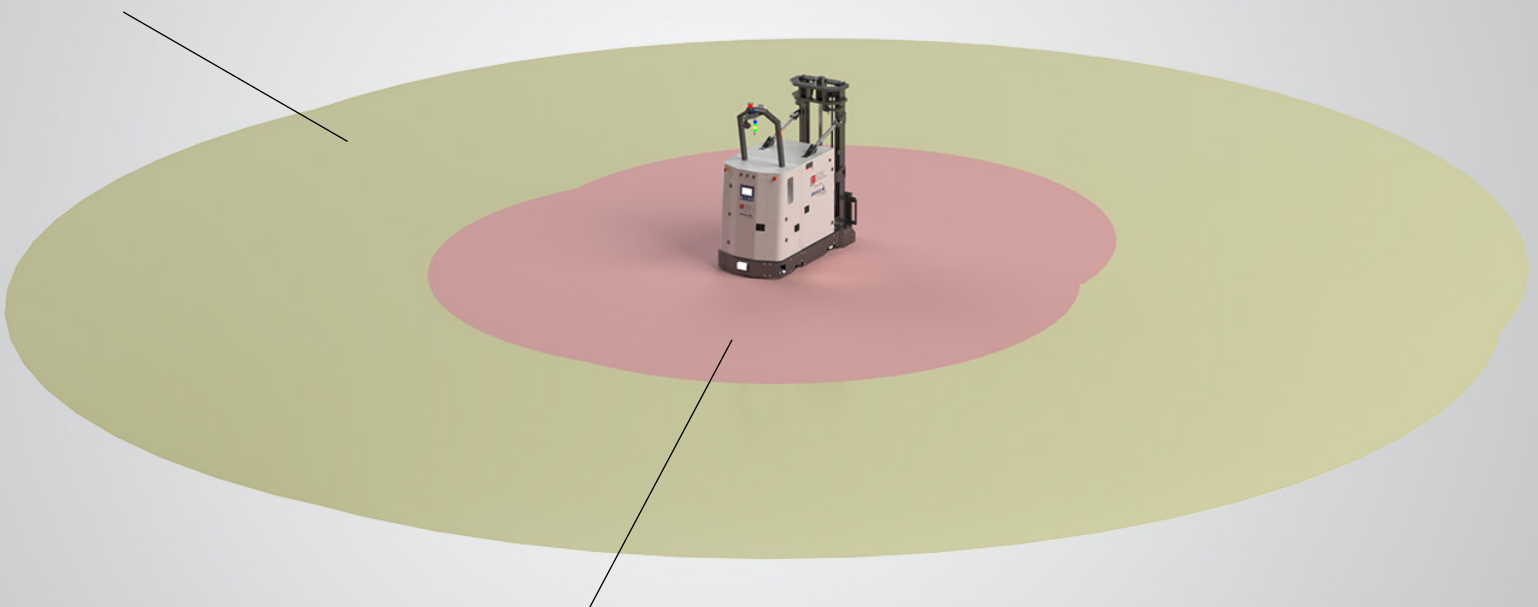

*Protective Field - up to 4 meters @ 40 mm object resolution*



# VEHICLE QUANTITY CHART

The chart below helps determine the optimal number of AGVs needed for an operation by looking at round-trip distance and loads moved per hour. By matching these variables in the chart, you can calculate the required fleet size to meet material handling demands efficiently. For example, moving 15 loads per hour, 700 feet round trip would require 2 AGVs.

Round Trip Distance (Meters)	Round Trip Distance (Feet)	Loads/Hr.													
		10	15	20	25	30	35	40	45	50	55	60	65	70	
8	25	0.2	0.3	0.3	0.4	0.5	0.6	0.7	0.8	0.9	0.9	1.0	1.1	1.2	
15	50	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	
23	75	0.3	0.4	0.5	0.6	0.8	0.9	1.0	1.2	1.3	1.4	1.6	1.7	1.8	
30	100	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.8	2.0	2.1	
38	125	0.3	0.5	0.7	0.9	1.0	1.2	1.4	1.6	1.7	1.9	2.1	2.2	2.4	
46	150	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.7	1.9	2.1	2.3	2.5	2.7	
53	175	0.4	0.6	0.9	1.1	1.3	1.5	1.7	1.9	2.2	2.4	2.6	2.8	3.0	
61	200	0.5	0.7	1.0	1.2	1.4	1.7	1.9	2.1	2.4	2.6	2.9	3.1	3.3	
69	225	0.5	0.8	1.0	1.3	1.6	1.8	2.1	2.3	2.6	2.9	3.1	3.4	3.6	
76	250	0.6	0.8	1.1	1.4	1.7	2.0	2.2	2.5	2.8	3.1	3.4	3.7	3.9	
84	275	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	3.3	3.6	3.9	4.2	
91	300	0.6	1.0	1.3	1.6	1.9	2.3	2.6	2.9	3.2	3.6	3.9	4.2	4.5	
99	325	0.7	1.0	1.4	1.7	2.1	2.4	2.8	3.1	3.5	3.8	4.2	4.5	4.8	
107	350	0.7	1.1	1.5	1.8	2.2	2.6	2.9	3.3	3.7	4.0	4.4	4.8	5.2	
114	375	0.8	1.2	1.6	1.9	2.3	2.7	3.1	3.5	3.9	4.3	4.7	5.1	5.5	
122	400	0.8	1.2	1.6	2.1	2.5	2.9	3.3	3.7	4.1	4.5	4.9	5.3	5.8	
130	425	0.9	1.3	1.7	2.2	2.6	3.0	3.5	3.9	4.3	4.8	5.2	5.6	6.1	
137	450	0.9	1.4	1.8	2.3	2.7	3.2	3.6	4.1	4.5	5.0	5.5	5.9	6.4	
145	475	1.0	1.4	1.9	2.4	2.9	3.3	3.8	4.3	4.8	5.2	5.7	6.2	6.7	
152	500	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	
160	525	1.0	1.6	2.1	2.6	3.1	3.6	4.2	4.7	5.2	5.7	6.2	6.8	7.3	
168	550	1.1	1.6	2.2	2.7	3.3	3.8	4.3	4.9	5.4	6.0	6.5	7.0	7.6	
175	575	1.1	1.7	2.3	2.8	3.4	3.9	4.5	5.1	5.6	6.2	6.8	7.3	7.9	
183	600	1.2	1.8	2.3	2.9	3.5	4.1	4.7	5.3	5.9	6.4	7.0	7.6	8.2	
190	625	1.2	1.8	2.4	3.0	3.6	4.2	4.9	5.5	6.1	6.7	7.3	7.9	8.5	
198	650	1.3	1.9	2.5	3.1	3.8	4.4	5.0	5.7	6.3	6.9	7.5	8.2	8.8	
206	675	1.3	2.0	2.6	3.3	3.9	4.6	5.2	5.9	6.5	7.2	7.8	8.5	9.1	
213	700	1.3	2.0	2.7	3.4	4.0	4.7	5.4	6.0	6.7	7.4	8.1	8.7	9.4	
221	725	1.4	2.1	2.8	3.5	4.2	4.9	5.5	6.2	6.9	7.6	8.3	9.0	9.7	
229	750	1.4	2.1	2.9	3.6	4.3	5.0	5.7	6.4	7.2	7.9	8.6	9.3	10.0	
236	775	1.5	2.2	2.9	3.7	4.4	5.2	5.9	6.6	7.4	8.1	8.8	9.6	10.3	
244	800	1.5	2.3	3.0	3.8	4.6	5.3	6.1	6.8	7.6	8.3	9.1	9.9	10.6	
251	825	1.6	2.3	3.1	3.9	4.7	5.5	6.2	7.0	7.8	8.6	9.4	10.1	10.9	
259	850	1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8.0	8.8	9.6	10.4	11.2	
267	875	1.6	2.5	3.3	4.1	4.9	5.8	6.6	7.4	8.2	9.1	9.9	10.7	11.5	
274	900	1.7	2.5	3.4	4.2	5.1	5.9	6.8	7.6	8.5	9.3	10.1	11.0	11.8	
282	925	1.7	2.6	3.5	4.3	5.2	6.1	6.9	7.8	8.7	9.5	10.4	11.3	12.1	
290	950	1.8	2.7	3.6	4.4	5.3	6.2	7.1	8.0	8.9	9.8	10.7	11.6	12.4	
297	975	1.8	2.7	3.6	4.6	5.5	6.4	7.3	8.2	9.1	10.0	10.9	11.8	12.8	





Southeast Industrial Equipment powered by AIM

CONTACT:

📍 Charlotte, NC

☎ 704.737.1890

🌐 [sieagvspoweredbyaim.com](http://sieagvspoweredbyaim.com)



**SOUTHEAST  
INTEGRATED  
SOLUTIONS**

powered by

